PEAD SERIES

R32
R410A



PEAD-M35/50/60/71/100/125/140JA(L)



The thin, ceiling-concealed indoor units of this series are the perfect answer for the air conditioning needs of buildings with minimum ceiling installation space and wide-ranging external static pressure. Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.

Compact Indoor Units

The height of the models from 35–140 has been unified to 250mm, which makes installation in low ceilings with minimal clearance space possilbe.




PEAD-M JA(L)

External Static Pressure

External static pressure conversion can be set up to five stages. Capable of being set to a maximum of 150Pa, units are applicable to a wide range of building types.

ErP Lot 10-compliant, Achieving High Energy Efficiency of SEER/SCOP Rank A+ and A++

A direct-current (DC) fan motor is installed in the indoor unit, increasing the seasonal energy efficiency of the newly designed Power Inverter Series (PUHZ-ZRP) and resulting in compliance of the full-capacity models with ErP Lot 10 and energy rankings of A+/A++ for cooling and A/A+ for heating. This contributes to an impressive reduction in the cost of annual electricity.

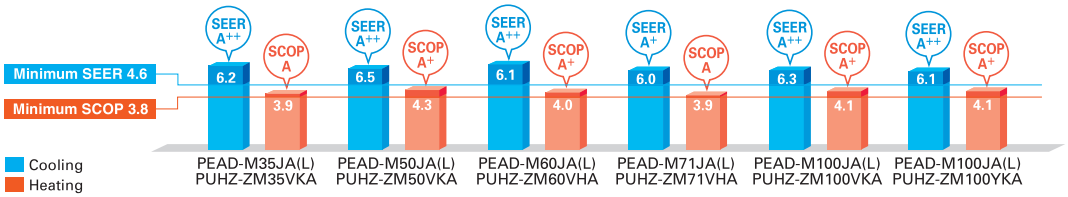

Drain Pump Option Available with All Models

The line-up consists of two types, models with or without a built-in drain pump.



PEAD-M JA → Drain pump built-in



PEAD-M JAL → No drain pump

✻Units with an "L" included at the end of the model name are not equipped with a drain pump.

SERIES SELECTION

Power Inverter Series

Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140

Outdoor Unit

R32

For Single



PUZ-ZM35/50



PUZ-ZM60/71



PUZ-ZM100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-ZM71



PUZ-ZM100/125/140/200/250

Remote Controller



Optional



Optional



Optional



Optional

PEAD-M JA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																				
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Power Inverter (PUHZ-ZRP)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	35x2	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E				MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E	

SERIES SELECTION

Standard Inverter Series

Indoor Unit

R32
R410A



PEAD-M35/50/60/71/100/125/140

Outdoor Unit

R32

For Single



SUZ-M35



SUZ-M50



SUZ-M60/71



PUZ-M100/125/140

R32

For Multi
(Twin/Triple/Quadruple)



PUZ-M100/125/140



PUZ-M200/250

Remote Controller



Optional



Optional



Optional



Optional

PEAD-M JA Indoor Unit Combinations

Indoor unit combinations shown below are possible.

Indoor Unit Combination		Outdoor Unit Capacity																				
		For Single									For Twin						For Triple			For Quadruple	
		35	50	60	71	100	125	140	200	250	71	100	125	140	200	250	140	200	250	200	250
Standard Inverter (PUHZ-P＆SUZ)		35x1	50x1	60x1	71x1	100x1	125x1	140x1	–	–	–	50x2	60x2	71x2	100x2	125x2	50x3	60x3	71x3	50x4	60x4
	Distribution Pipe	–	–	–	–	–	–	–	–	–	–	MSDD-50TR2-E			MSDD-50WR2-E		MSDT-111R3-E			MSDF-1111R2-E	

PEAD-M SERIES
POWER INVERTER

Demand Control (Optional) · Long Life · Check! · AUTO · ACO · Auto Restart · Low Temp Cooling · Silent · Ampere Limit (60-140V/200/250) · Rotation Back-up (PUHZ, Optional) · Group Control · M-NET connection (Optional) · Wi-Fi Interface (Optional) · COMPO

Cleaning-free pipe routing · Wiring Reuse (Optional) · Drain Lift Up (JAQ) · Pump Down · Flare connection · Self Diagnosis · Failure Recall

Type				Inverter Heat Pump									
Indoor Unit				PEAD-M35JA(L)	PEAD-M50JA(L)	PEAD-M60JA(L)	PEAD-M71JA(L)	PEAD-M100JA(L)		PEAD-M125JA(L)		PEAD-M140JA(L)	
Outdoor Unit				PUZ-ZM35VKA	PUZ-ZM50VKA	PUZ-ZM60VHA	PUZ-ZM71VHA	PUZ-ZM100VKA	PUZ-ZM100YKA	PUZ-ZM125VKA	PUZ-ZM125YKA	PUZ-ZM140VKA	PUZ-ZM140YKA
Refrigerant				R32*1									
Power Supply	Source			Outdoor power supply									
	Outdoor (V/Phase/Hz)			VKA・VHA:230 / Single / 50, YKA:400 / Three / 50									
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.5	12.5	13.4	13.4
		Min - Max	kW	1.6 - 4.5	2.3 - 5.6	2.7 - 6.7	3.3 - 8.1	4.9 - 11.4	4.9 - 11.4	5.5 - 14.0	5.5 - 14.0	6.2 - 15.3	6.2 - 15.3
	Total Input	Rated	kW	0.837(0.820)	1.201(1.187)	1.509(1.495)	1.858(1.844)	2.272(2.256)	2.272(2.256)	3.333(3.315)	3.333(3.315)	3.631(3.611)	3.631(3.611)
	EER*4			4.30(4.39)	4.16(4.21)	4.04(4.08)	3.82(3.85)	4.18(4.21)	4.18(4.21)	3.75(3.77)	3.75(3.77)	3.69(3.71)	3.69(3.71)
		EEL Rank		–	–	–	–	–	–	–	–	–	–
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	–	–	–	–
	Annual Electricity Consumption*2		kWh/a	217(201)	282(268)	350(337)	428(414)	534(521)	543(532)	–	–	–	–
	SEER*4			5.8(6.2)	6.2(6.5)	6.1(6.3)	5.8(6.0)	6.2(6.3)	6.1(6.2)	–	–	–	–
		Energy Efficiency Class		A+(A++)	A++(A++)	A++(A++)	A+(A+)	A++(A++)	A++(A++)	–	–	–	–
Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	14.0	14.0	16.0	16.0
		Min - Max	kW	1.6 - 5.2	2.5 - 7.3	2.8 - 8.2	3.5 - 10.2	4.5 - 14.0	4.5 - 14.0	5.0 - 16.0	5.0 - 16.0	5.7 - 18.0	5.7 - 18.0
	Total Input	Rated	kW	0.917	1.312	1.616	1.932	2.598	2.598	3.349	3.349	3.970	3.970
	COP*4			4.47	4.57	4.33	4.14	4.31	4.31	4.18	4.18	4.03	4.03
		EEL Rank		–	–	–	–	–	–	–	–	–	–
	Design Load		kW	2.4	3.8	4.4	4.9	7.8	7.8	–	–	–	–
	Declared Capacity	at reference design temperature	kW	2.4(–10°C)	3.8(–10°C)	4.4(–10°C)	4.9(–10°C)	7.8(–10°C)	7.8(–10°C)	–	–	–	–
		at bivalent temperature	kW	2.4(–10°C)	3.8(–10°C)	4.4(–10°C)	4.9(–10°C)	7.8(–10°C)	7.8(–10°C)	–	–	–	–
		at operation limit temperature	kW	2.2(–11°C)	3.7(–11°C)	2.8(–20°C)	3.7(–20°C)	5.8(–20°C)	5.8(–20°C)	–	–	–	–
	Back Up Heating Capacity		kW	0	0	0	0	0	0	–	–	–	–
	Annual Electricity Consumption*2		kWh/a	858	1237	1540	1751	2666	2666	–	–	–	–
	SCOP*4			3.9	4.3	4.0	3.9	4.1	4.1	–	–	–	–
		Energy Efficiency Class		A	A+	A+	A	A+	A+	–	–	–	–
Operating Current (max)			A	14.1	14.4	20.6	21.0	29.2	10.7	29.3	12.3	30.8	15.8
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.09/0.07	0.11/0.09	0.12/0.10	0.17/0.15	0.25/0.23	0.25/0.23	0.36/0.34	0.36/0.34	0.39/0.37	0.39/0.37
	Operating Current (max)		A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	2.78
	Dimensions <Panel>	H × W × D	mm	250-900-732		250-1100-732		250-1400-732				250-1600-732	
	Weight <Panel>		kg	26(25)	27(26)	30(29)	30(29)	39(38)	39(38)	40(39)	40(39)	44(43)	44(43)
	Air Volume [Lo-Mid-Hi]		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	17.5-21.0-25.0	24.0-29.0-34.0	24.0-29.0-34.0	29.5-35.5-42.0	29.5-35.5-42.0	32.0-39.0-46.0	32.0-39.0-46.0
	External Static Pressure		Pa	35 / 50 / 70 / 100 / 150									
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	23 - 27 - 30	26 - 31 - 35	25 - 29 - 33	26 - 30 - 34	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40	33 - 36 - 40	34 - 38 - 43	34 - 38 - 43
	Sound Level (PWL)		dB(A)	54	59	55	58	62	62	66	66	67	67
Outdoor Unit	Dimensions	H × W × D	mm	630 - 809 - 300		943 - 950 - 330(+25)		1338 - 1050 - 330(+40)					
	Weight		kg	46	46	70	70	116	123	116	125	118	131
	Air Volume	Cooling	m³/min	45	45	55	55	110	110	120	120	120	120
		Heating	m³/min	45	45	55	55	110	110	120	120	120	120
	Sound Level (SPL)	Cooling	dB(A)	44	44	47	47	49	49	50	50	50	50
		Heating	dB(A)	46	46	49	49	51	51	52	52	52	52
	Sound Level (PWL)	Cooling	dB(A)	65	65	67	67	69	69	70	70	70	70
	Operating Current (max)		A	13.0	13.0	19.0	19.0	26.5	8.0	26.5	9.5	28.0	13.0
	Breaker Size		A	16	16	25	25	32	16	32	16	40	16
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 12.7	6.35 / 12.7	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	50	50	55	55	100	100	100	100	100	100
	Max. Height	Out-In	m	30	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range [Outdoor]		Cooling*3	°C	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46
		Heating	°C	–11 ~ +21	–11 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21	–20 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.

Demand Control (Optional) · Long Life · Check! · AUTO · ACO · Auto Restart · Low Temp Cooling · Silent · Ampere Limit (60-140V/200/250) · Rotation Back-up (PUHZ, Optional) · Group Control · M-NET connection (Optional) · Wi-Fi Interface (Optional) · COMPO

Cleaning-free pipe routing · Wiring Reuse (Optional) · Drain Lift Up (JAQ) · Pump Down · Flare connection · Self Diagnosis · Failure Recall

PEAD-M SERIES
STANDARD INVERTER

Type				Inverter Heat Pump									
Indoor Unit				PEAD-M35JA(L)	PEAD-M50JA(L)	PEAD-M60JA(L)	PEAD-M71JA(L)	PEAD-M100JA(L)		PEAD-M125JA(L)		PEAD-M140JA(L)	
Outdoor Unit				SUZ-M35VA	SUZ-M50VA	SUZ-M60VA	SUZ-M71VA	PUZ-M100VKA	PUZ-M100YKA	PUZ-M125VKA	PUZ-M125YKA	PUZ-M140VKA	PUZ-ZM140YKA
Refrigerant				R32*1									
Power Supply	Source			Outdoor power supply									
	Outdoor (V/Phase/Hz)			VA・VKA: 230 / Single / 50, YKA: 400 / Three / 50									
Cooling	Capacity	Rated	kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
		Min - Max	kW	0.8 - 3.9	1.7 - 5.6	1.6 - 6.3	2.2 - 8.1	4.0 - 10.6	4.0 - 10.6	6.0 - 13.0	6.0 - 13.0	6.1 - 14.1	6.1 - 14.1
	Total Input	Rated	kW	0.92(0.90)	1.35(1.33)	1.69(1.67)	2.02(2.00)	2.87(2.85)	2.87(2.85)	4.01(3.99)	4.01(3.99)	4.76	4.76
	EER*4			3.90(4.00)	3.70(3.75)	3.60(3.65)	3.50(3.55)	3.30(3.33)	3.30(3.33)	3.01(3.03)	3.01(3.03)	2.81	2.81
		EEL Rank		–	–	–	–	–	–	–	–	–	–
	Design Load		kW	3.6	5.0	6.1	7.1	9.5	9.5	12.1	12.1	13.4	13.4
	Annual Electricity Consumption*2		kWh/a	217(199)	287(271)	353(335)	428(411)	613(598)	613(598)	–	–	–	–
	SEER*4			5.8(6.3)	6.1(6.4)	6.0(6.3)	5.8(6.0)	5.4(5.5)	5.4(5.5)	–	–	–	–
		Energy Efficiency Class		A+(A++)	A++(A++)	A+(A++)	A+(A+)	A (A)	A (A)	–	–	–	–
Heating (Average Season)	Capacity	Rated	kW	4.1	6.0	7.0	8.0	11.2	11.2	13.5	13.5	15.0	15.0
		Min - Max	kW	1.1 - 5.0	1.5 - 7.2	1.6 - 8.0	2.0 - 10.2	2.8 - 12.5	2.8 - 12.5	4.1 - 15.0	4.1 - 15.0	4.2 - 15.8	4.2 - 15.8
	Total Input	Rated	kW	1.02	1.46	1.84	2.15	2.94	2.94	3.73	3.73	4.15	4.15
	COP*4			4.00	4.10	3.80	3.71	3.80	3.80	3.61	3.61	3.61	3.61
		EEL Rank		–	–	–	–	–	–	–	–	–	–
	Design Load		kW	2.6	4.3	4.6	5.8	8.0	8.0	8.5	8.5	9.4	9.4
	Declared Capacity	at reference design temperature	kW	2.3(–10°C)	3.8(–10°C)	4.1(–10°C)	5.2(–10°C)	6.0(–10°C)	6.0(–10°C)	8.5(–10°C)	8.5(–10°C)	9.4(–10°C)	9.4(–10°C)
		at bivalent temperature	kW	2.3(–7°C)	3.8(–7°C)	4.1(–7°C)	5.2(–7°C)	7.0(–7°C)	7.0(–7°C)	8.5(–10°C)	8.5(–10°C)	9.4(–10°C)	9.4(–10°C)
		at operation limit temperature	kW	2.3(–10°C)	3.8(–10°C)	4.1(–10°C)	5.2(–10°C)	4.5(–15°C)	4.5(–15°C)	6.0(–15°C)	6.0(–15°C)	7.0(–15°C)	7.0(–15°C)
	Back Up Heating Capacity		kW	0.5	0.5	0.5	0.6	2.0	2.0	–	–	–	–
	Annual Electricity Consumption*2		kWh/a	931	1430	1594	2080	2795	2795	–	–	–	–
	SCOP*4			3.9	4.2	4.0	3.9	4.0	4.0	–	–	–	–
		Energy Efficiency Class		A	A+	A+	A	A+	A+	–	–	–	–
Operating Current (max)			A	9.6	14.9	16.4	16.8	22.7	14.2	29.3	14.3	32.8	14.3
Indoor Unit	Input [Cooling / Heating]	Rated	kW	0.09(0.07)/0.07	0.11(0.09)/0.09	0.12(0.10)/0.10	0.17(0.15)/0.15	0.25(0.23)/0.23	0.25(0.23)/0.23	0.36(0.34)/0.34	0.36(0.34)/0.34	0.39(0.37)/0.37	0.39(0.37)/0.37
	Operating Current (max)		A	1.07	1.39	1.62	1.97	2.65	2.65	2.76	2.76	2.78	2.78
	Dimensions <Panel>	H × W × D	mm	250-900-732		250-1100-732		250-1400-732				250-1600-732	
	Weight <Panel>		kg	26(25)	27(26)	30(29)	30(29)	39(38)	39(38)	40(39)	40(39)	44(43)	44(43)
	Air Volume [Lo-Mid-Hi]		m³/min	10.0-12.0-14.0	12.0-14.5-17.0	14.5-18.0-21.0	17.5-21.0-25.0	24.0-29.0-34.0	24.0-29.0-34.0	29.5-35.5-42.0	29.5-35.5-42.0	32.0-39.0-46.0	32.0-39.0-46.0
	External Static Pressure		Pa	35 / 50 / 70 / 100 / 150									
	Sound Level (SPL) [Lo-Mid-Hi]		dB(A)	23 - 27 - 30	26 - 31 - 35	25 - 29 - 33	26 - 30 - 34	29 - 34 - 38	29 - 34 - 38	33 - 36 - 40	33 - 36 - 40	34 - 38 - 43	34 - 38 - 43
	Sound Level (PWL)		dB(A)	54	59	55	58	62	62	66	66	67	67
Outdoor Unit	Dimensions	H × W × D	mm	550 - 800 - 285	714 - 800 - 285	880 - 840 - 330		981 - 1050 - 330		981 - 1050 - 330(+40)			
	Weight		kg	35	41	54	55	76	78	84	85	84	85
	Air Volume	Cooling	m³/min	34.3	45.8	50.1	50.1	79.0	79.0	86.0	86.0	86.0	86.0
		Heating	m³/min	32.7	43.7	50.1	50.1	79.0	79.0	92.0	92.0	92.0	92.0
	Sound Level (SPL)	Cooling	dB(A)	48	48	49	49	51	51	54	54	55	55
		Heating	dB(A)	48	49	51	51	54	54	56	56	57	57
	Sound Level (PWL)	Cooling	dB(A)	59	64	65	66	70	70	72	72	73	73
	Operating Current (max)		A	8.5	13.5	14.8	14.8	20.0	11.5	26.5	11.5	30.0	11.5
	Breaker Size		A	16	20	20	20	32	16	32	16	40	16
Ext. Piping	Diameter	Liquid / Gas	mm	6.35 / 9.52	6.35 / 12.7	6.35 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88	9.52 / 15.88
	Max. Length	Out-In	m	20	30	30	30	55	55	65	65	65	65
	Max. Height	Out-In	m	12	30	30	30	30	30	30	30	30	30
Guaranteed Operating Range [Outdoor]		Cooling*3	°C	–10 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46	–15 ~ +46
		Heating	°C	–10 ~ +24	–10 ~ +24	–10 ~ +24	–10 ~ +24	–15 ~ +21	–15 ~ +21	–15 ~ +21	–15 ~ +21	–15 ~ +21	–15 ~ +21

*1 Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional. The GWP of R32 is 675 in the IPCC 4th Assessment Report.
*2 Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
*3 Optional air protection guide is required where ambient temperature is lower than –5°C. *4 EER/COP and SEER/SCOP for M35-71 are measured at ESP 35Pa, for M100 at ESP 37Pa, for M125/140 at ESP 50Pa.