MSY-TP SERIES


Cooling only model with high-perfomance provides high SHF in various environments thanks to wide operation range.

R32

MSY-TP35/50VF




High Energy-Saving Performance with High SHF

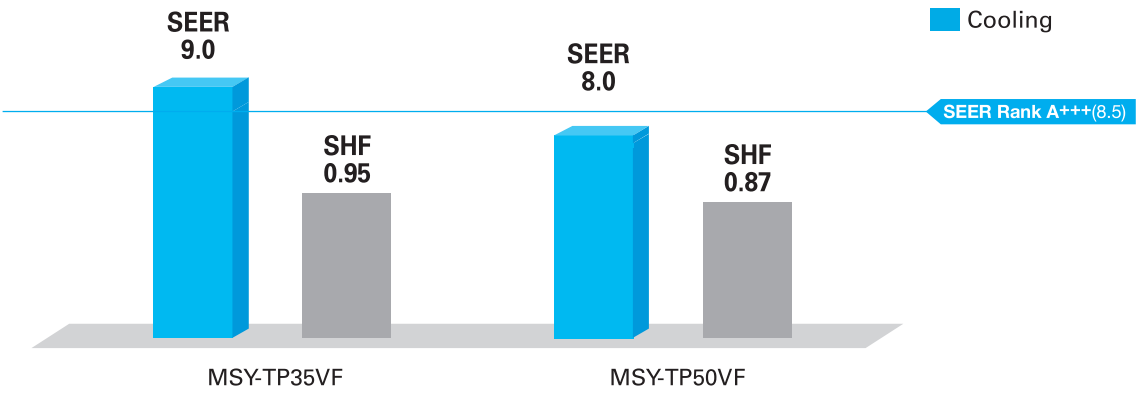

Wide Cooling Operating Range

As a result of an extended operating range in cooling, these models accommodate a wide range of usage environments and applications.

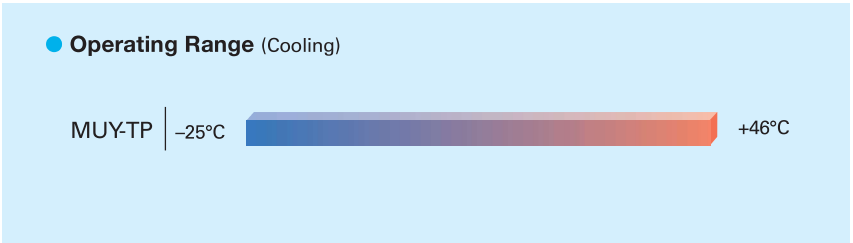

MSY-TP SERIES



Indoor Unit R32



MSY-TP35/50VF


Outdoor Unit R32



MUY-TP35/TP50VF

Remote Controller

- Wired remote controller can be connected to indoor unit.





Type				Inverter Heat Pump	
Indoor Unit				MSY-TP35VF	MSY-TP50VF
Outdoor Unit				MUY-TP35VF	MUY-TP50VF
Refrigerant				R32 (*1)	
Power Supply	Source			Indoor Power supply	
	Outdoor (V / Phase / Hz)			230V / Single / 50Hz	
Cooling	Design load		kW	3.5	5.0
	Annual electricity consumption (*2)		kWh/a	136	218
	SEER (*4)			9.0	8.0
		Energy efficiency class		A+++	A++
	Capacity	Rated	kW	3.5	5.0
		Min-Max	kW	1.5 - 4.0	1.5 - 5.7
	Total Input	Rated	kW	0.760	1.450
Heating (Average Season)(*5)	Design load		kW	-	-
	Declared Capacity	at reference design temperature	kW	-	-
		at bivalent temperature	kW	-	-
		at operation limit temperature	kW	-	-
	Back up heating capacity		kW	-	-
	Annual electricity consumption (*2)		kWh/a	-	-
	SCOP (*4)			-	-
		Energy efficiency class		-	-
	Capacity	Rated	kW	-	-
		Min-Max	kW	-	-
	Total Input	Rated	kW	-	-
Operating Current (Max)			A	9.6	9.6
Indoor Unit	Input	Rated	kW	0.033	0.034
	Operating Current (Max)		A	0.4	0.4
	Dimensions	H*W*D	mm	305-923-250	305-923-250
	Weight		kg	12.5	12.5
	Air Volume (Lo-Mid-Hi-SHi(*3))	Cooling	m^3/min	10.1 - 11.6 - 13.7 - 16.4	10.1 - 11.6 - 13.7 - 16.4
		Heating	m^3/min	-	-
	Sound Level (SPL) (Lo-Mid-Hi-SHi(*3))	Cooling	dB(A)	31 - 36 - 40 - 45	31 - 36 - 40 - 45
		Heating	dB(A)	-	-
	Sound Level (PWL)	Cooling	dB(A)	60	60
	Breaker Size		A	10	10
Outdoor Unit	Dimensions	H*W*D	mm	550-800-285	550-800-285
	Weight		kg	34	34
	Air Volume	Cooling	m^3/min	29.3	29.3
		Heating	m^3/min	-	-
	Sound Level (SPL)	Cooling	dB(A)	45	47
		Heating	dB(A)	-	-
	Sound Level (PWL)	Cooling	dB(A)	58	61
	Operating Current (Max)		A	9.2	9.2
Ext. Piping	Diameter	Liquid/Gas	mm	6.35/9.52	6.35/9.52
	Max.Length	Out-In	m	20	20
	Max.Height	Out-In	m	12	12
Guaranteed Operating Range (Outdoor)		Cooling	℃	-25 ~ +46	-25 ~ +46
		Heating	℃	-	-

(*1) Refrigerant leakage contributes to climate change. Refrigerant with lower global warming potential (GWP) would contribute less to global warming than a refrigerant with higher GWP, if leaked to the atmosphere. This appliance contains a refrigerant fluid with a GWP equal to 550. This means that if 1 kg of this refrigerant fluid would be leaked to the atmosphere, the impact on global warming would be 550 times higher than 1 kg of CO_2, over a period of 100 years. Never try to interfere with the refrigerant circuit yourself or disassemble the product yourself and always ask a professional.
The GWP of R32 is 675 in the IPCC 4th Assessment Report.
(*2) Energy consumption based on standard test results. Actual energy consumption will depend on how the appliance is used and where it is located.
(*3) SHi: Super High
(*4) SEER and other related description are based on COMMISSION DELEGATED REGULATION (EU) No.626/2011.